

# USER MANUAL HLT-2.6


## INTRODUCTION

This is a tracking device (tracker) which uses GPS-based location positioning to provide information about the location. And GSM/GPRS for data connection. The tracker includes a SIM-card, which supports roaming, SMS and voice throughout Europe.

**NB!** Voice and SMS to the tracker will result in mobile fees. Information about prices can be obtained from your mobile service provider. In order to use the tracker, the Huntloc App needs to be downloaded to the user's smartphone, and the User License also needs to be activated. At the moment Huntloc App is available only for Android and iOS operating systems.

**NB!** When using the Huntloc App, constant GPS and GPRS service needs to be available. Monthly data and subscription prices can be obtained from your mobile service provider.

## DEVICE

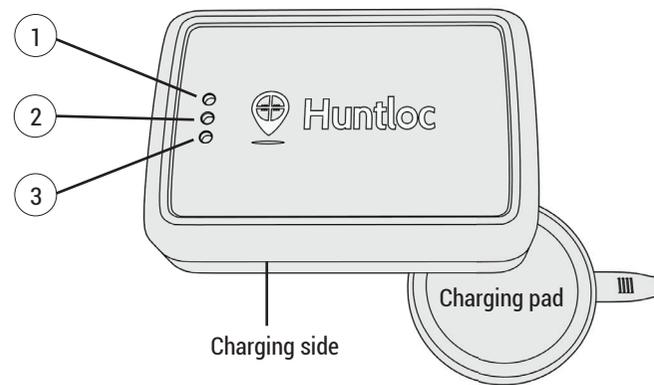

1.

**GREEN LED:**  
**GPS**

**blinking:** GPS is on, searching for GPS

**ON:** GPS is on, position is located

2.

**BLUE LED:**  
**GSM**

**blinking:** GSM is on, standby mode

**ON:** connection with server

3.

**RED LED:**  
**CHARGING**

**blinking:** tracker is connected with charger & charging

## BATTERY CHARGE

Before first use, you must charge the battery. To charge tracker, use the Qi wireless charging pad.

1. To begin charging, connect charging pad into mains power supply using the microUSB cable. Charging pad led indicator should go red.

2. Place the tracker on the charging pad. The red led on tracker should light and charging pad led indicator goes blue.

## CONFIGURATIONS

In order to connect Huntloc App with the tracker:

1. Open Huntloc App and choose "**Trackers**" from the menu.

2. To connect the new tracker: choose "+" and then choose type of the tracking device.

3. Insert the tracker's IMEI code and the GSM number, including the international code. Information is provided on the box and also on the tracker.

4. Then enter the name of the object that is being tracked. This name will appear on the tracking screen. (ie. the dog's name). After saving the data, the tracker will be added to the list of tracking devices.

## ACTIVATING TRACKER (STAND-BY MODE)

1. To turn the tracker on, place the tracker on the charging pad.

2. Wait until the GPS LED (blue) starts blinking.

## TURNING ON TRACKING MODE

1. Make sure that the tracker is on stand-by mode (blue LED is blinking).

2. Open Huntloc App and choose "**Trackers**" from menu.

3. Choose the relevant device.

4. Push the "**On**" button and confirm to start tracking, which results in a call to tracker. Call will be terminated by the tracker.

To share tracking of the object with another hunter, the tracker owner has to start or join with an active hunt, on the Huntloc App.

## CHANGING TRACKING MODE TO STAND-BY

1. Open the Huntloc App and choose "**Trackers**" from the menu.

2. Choose the relevant device.

3. Push the "**OFF**" button and confirm SMS sending request.

## TURNING OFF THE TRACKER

1. Open the Huntloc App and choose "**Trackers**" from the menu.

2. Choose the relevant device.

3. Select "**X**" from the top menu bar and confirm SMS sending request.

**NB!** When the tracker is turned off, it is impossible to activate it by using a smart device. To put the tracker back into 'stand-by' mode, place the tracker on charging pad.

## CHANGING TRACKING INTERVAL

1. Open the Huntloc App and choose "**Trackers**" from the menu.

2. Choose the relevant device.

3. Enter data transmitting interval in seconds, in interval field.

4. Push the "**Apply**" button and confirm SMS sending request. When tracking, device is in 'Stand-by' mode, changing the tracking interval will activate 'tracking' mode. The default tracking interval is 10 seconds. Shorter interval results in shorter battery life.

## LISTENING TO THE DOG AND SENDING VOICE COMMANDS

1. Open the Huntloc App and choose "**Trackers**" from the menu.

2. Choose the relevant device.

3. Push the "**Call**" button and agree with calling. The tracker will automatically answer the call, and then the dog owner can hear the dog's barking. The owner can then also give voice commands to the dog.

In order to make a call to the tracker, it has to be in 'Tracking' mode. If the device is in 'Stand-by' mode, it will be activated and changed to 'Tracking' mode.

**NB!** Listening dog barking on the phone will incur phone costs.

## NOT USING THE DEVICE FOR LONG PERIODS

When the tracker is not used for a long time, its battery will need to be fully charged and turned off. Otherwise the battery may be irreversibly damaged, and might not work afterwards.

## MORE INFORMATION

More information about the tracker and about Huntloc's solution, please do visit our website [www.huntloc.com](http://www.huntloc.com).

## DEVICE COMMANDS

### TURNING ON (STAND-BY MODE) AND CHARGING

Place the device on charging pad.

### TURNING OFF

a) SMS "00"

b) Place the tracker in the charging stand and wait for the green light to light. Raise the device and insert straight back. The green light goes off and the unit shuts off. Remove tracker.

### TURNING ON TRACKING MODE

a) Call to the tracking device.

b) Send SMS "1".

### TURNING TRACKING MODE ON WITH DIFFERENT INTERVALS

Send SMS "1XX" ( XX = interval in seconds).

### TURNING OFF THE TRACKING MODE

Send SMS "0".

### RESETING THE TRACKER

a) Send SMS "reset".

b) place the tracker on charging pad.

### FIRMWARE UPDATING

Send SMS "fw".

## INCLUDED IN THE BOX

Tracker HLT-2.6	1 pc
Wireless charging pad	1 pc
microUSB cable	1 pc
USB charger	1 pc
User Manual	1 pc

## TECHNICAL DATA

Stand-by time	up to 30 days
Tracing time (10 sec)	up to 36 hours
Waterproof	IP67
Weight	108 g
Working temperature	-30 +40°C
Tracking interval Starting	1s
Battery	1 850 mAh Li-ion
Charging time	3 hours

## TERMS OF WARRANTY

**Every Huntloc tracking device has a guarantee**, which is active for twenty four (24) months, starting from the date the client bought the device (Guarantee time).

**Any device which is used for commercial purposes**, for example renting, or any other than normal purposes, has a guarantee of only twelve (12) months.

**Extra equipment, which is added to the box, or bought separately**, has a guarantee of only twelve (12) months.

During the Guarantee period Huntloc takes full responsibility to eliminate by its choice, whatever defects, or replace the whole device, or its parts, for free (Guarantee service).

Replaced parts or product, will be sent in case of exchange: replaced part or device is either new or in condition that it is like new. A repaired or replaced device has a guarantee period, which is equal to guarantee time given to the first purchased device.

## TO CLAIM GUARANTEE

To claim Guarantee service, please do contact **Huntloc OÜ, Riia 185a, Tartu, Estonia or e-mail info@huntloc.com**. Contact information is available on Huntloc website: [www.huntloc.com](http://www.huntloc.com).

Please present original receipt with the date the device was purchased; include a written description of the problem with the device, and make sure that the device is packed carefully before sending it to Huntloc. Huntloc will examine your request, and will perform guarantee service according to settled clause and law.

The tracking device that does not meet these requirements and is returned, Huntloc will pay back the cost of the device, plus shipping costs within 30 days, after receiving the notice of refusal of buying the product, or returning the product.

## GUARANTEE DOES NOT APPLY ON DEFECTS THAT ARE CAUSED BY:

- Regular wearing, accident or cosmetic damage;
- Misuse and mismanagement (including misuse of the settings);
- Electrical fluctuations, short circuits, wrong voltage;
- Not doing any meaningful or necessary service to the device;
- Harm done by dog, animals etc. or other vermin/pests;
- Incorrect or incomplete installation;
- Ignoring the instructions in the User Manual, in addition to overusing and overloading;
- No targeted usage;
- Coming into contact with extreme temperature or environmental conditions, or very sudden changes in named conditions; being in contact with chemicals; using damaged or leaking???

## GUARANTEE DOES NOT APPLY UNDER THE FOLLOWING CONDITIONS:

- On the products which the manufacturer's serial number or IMEI code is deleted, damaged or unreadable;
- Materials that wear off: (components that need constant replacement, while using), including dogs collar.

Guarantee does not apply in situations where Huntloc tracking device is impossible to use, for whatever indirect expenses.

## CONTACT

**Huntloc OÜ**

**Riia 185a, Tartu**

**Eesti/Estonia**

**info@huntloc.com**

**www.huntloc.com**

Download from AppStore



Download from Google Play

